




SEBA

HYDROMETRIE

SEBA GSM MODEM GSM 740

QZV We are certificated
ISO 9001
certificate no. 01110505
Quality Is Our Standard

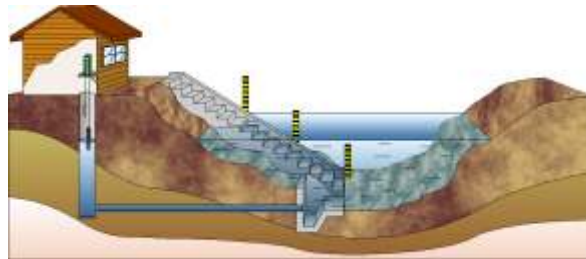

GSM 740

- DualBand
- Extended temperature range
- Water tight housing (IP67)
- Low energy operation
- Safety functions

Surface Water

Technical Data SEBA GSM 740


Frequency: 900MHz and 1800MHz (EGSM, Dualband)
 RF-Output max.: 2W Class 4 at 900MHz, 1W Class1 at 1800MHz
 Antenna impedance: 50 Ohm
 SIM-Card: 3V or 5V

Power supply: 8VDC..20VDC
 Current: 30mA (standby), 100mA (receive), 1A (transmit)

Operating temperature: -30°C..85°C
 Storage temperature: -40°C..85°C

Protection : IP65

The GSM 740 conforms to the appropriate standards 3GPP TS51010-1, EN 301489-7 and EN 60950 and Telecommunication Terminal Equipment directive 99/5/EC with requirements covering EMC directive 89/336/EEC, and Low Voltage directive 73/23/EEC.

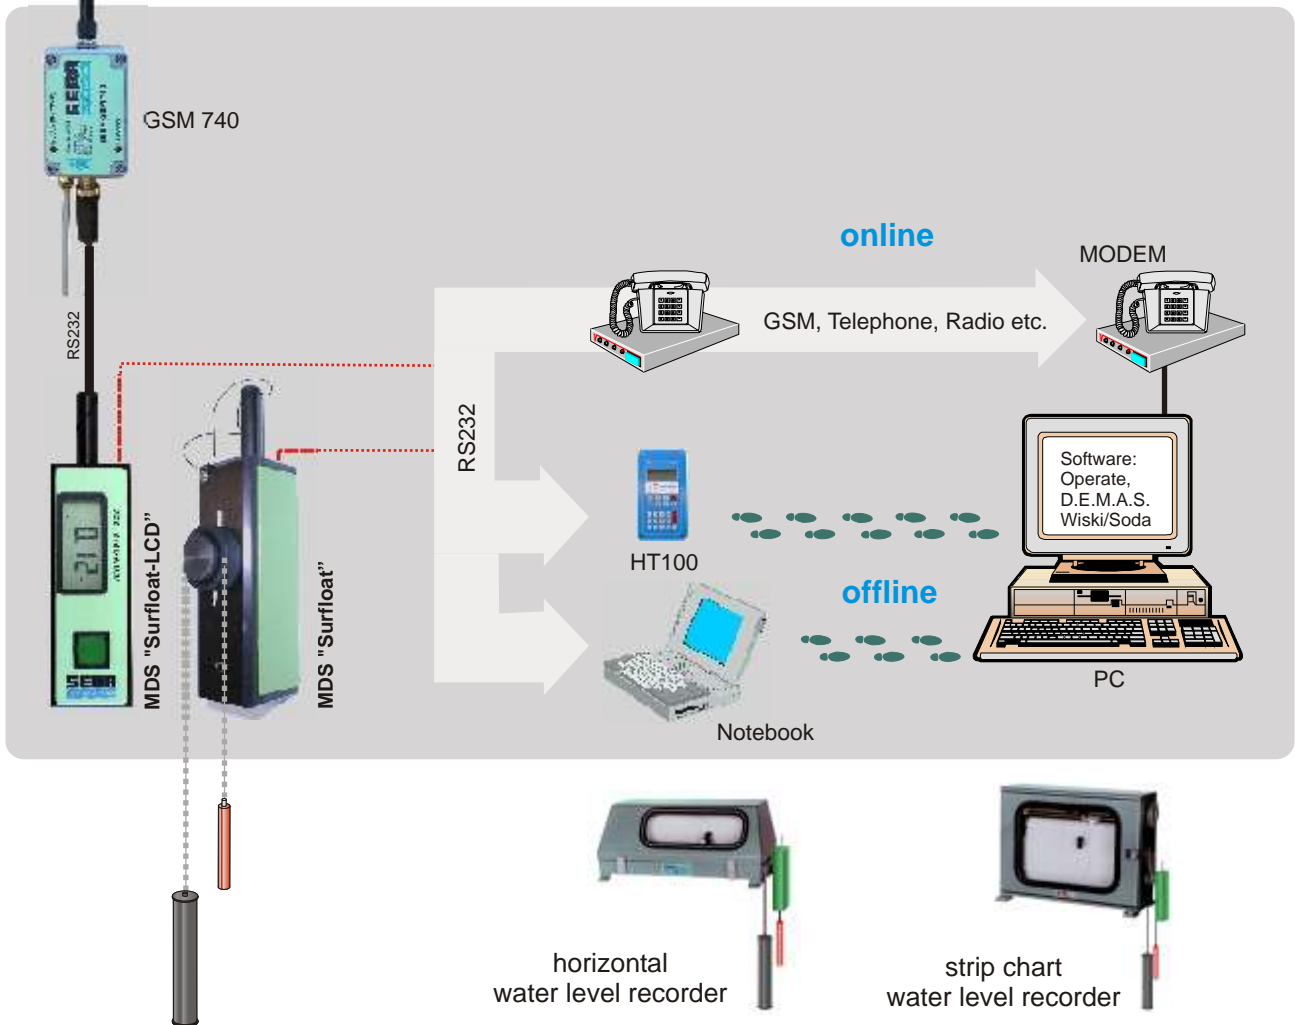

SEBA Hydrometrie GmbH
 Gewerbestr. 61a • D-87600 Kaufbeuren
 Tel.: +49 (0)8341 / 9648-0
 Fax: +49 (0)8341 / 9648-48
 E-Mail: info@seba.de
 Internet: www.seba.de

represented by: