









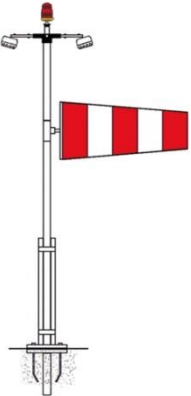


#	Description	Model
	<b>Complete windsock,</b> with red & white conical sleeve attached to basket. Basket material: galvanized steel Sleeve material: special very resistant textile. Ø 30 cm, L = 180 cm ..... Ø 40 cm, L = 250 cm ..... Ø 65 cm, L = 350 cm ..... Ø 90 cm, L = 450 cm .....	  44.002 44.004 44.006 44.008
	Red & white <b>windsock (sleeve only)</b> with fixing eyelets for basket Material : special very resistant textile. Ø 30 cm, L = 180 cm ..... Ø 30 cm, L = 180 cm, reinforced version ..... Ø 40 cm, L = 250 cm ..... Ø 40 cm, L = 250 cm, reinforced version ..... Ø 60 cm, L = 250 cm ..... Ø 60 cm, L = 250 cm, reinforced version ..... Ø 65 cm, L = 350 cm ..... Ø 65 cm, L = 350 cm, reinforced version ..... Ø 90 cm, L = 450 cm ..... Ø 90 cm, L = 450 cm, reinforced version ..... Ø 100 cm, L = 450 cm ..... Ø 100 cm, L = 450 cm, reinforced version .....	  44.020 44.020V 44.025 44.025V 44.028 44.028V 44.030 44.030V 44.035 44.035V 44.040 44.040V
	Orange <b>windsock (sleeve only)</b> with fixing eyelets for basket. Material : special very resistant textile. Ø 30 cm, L = 180 cm ..... Ø 40 cm, L = 250 cm ..... Ø 65 cm, L = 350 cm ..... Ø 90 cm, L = 450 cm ..... Ø 100 cm, L = 450 cm .....	  44.021 44.026 44.031 44.036 44.041
	<b>Basket</b> made in galvanized steel for ditto with ball movement system. . Ø 30 cm ..... Ø 40 cm ..... Ø 65 cm ..... Ø 90 cm .....	  44.100 44.105 44.110 44.115
	<b>Mast</b> made of galvanized steel tubes which can be inserted one inside the other and including fixing and adaptation parts for basket. Ø tube:42 mm, thickness : 2 mm <b>(only suitable for Ø 30 et 40 models)</b> (Masts for larger windsocks: on request) Height 150 cm ..... Height 200 cm ..... Height 300 cm .....	  44.070 44.075 44.080

#	Description	Model
	<b>Closing cap</b> for mast	44085
	<b>Mast base</b> made in galvanized steel consisting of 2 U rails Length : 150 cm, width : 10 cm. Supplied with M10 bolts, washers and nuts required for fixing. To be set in the ground to a depth of about 50 cm.	44.090
	<b>Wall mounting system</b> consisting of two brackets to be attached to an exterior wall.	44.095
	<b>Tilting mast base</b> made in galvanized steel Height : 1,50 m Ground plate : 250 x 250 x 10 mm. Delivered without windsock, basket and mast.	44.096
	<b>Standalone tripod</b> made of very robust galvanized steel and easy to transport. Ø tube : 60 mm for mast insertion Height (without mast): 1,2 m Weight : 9 kg	44.220
	<b>Illuminated mast</b> for windsock system Illumination: by 4 headlights Mast with tilting movement in galvanized steel, including obstacle light signaling Fixing: to be discussed Height: to be discussed	44.250A