


Anemometer

7911

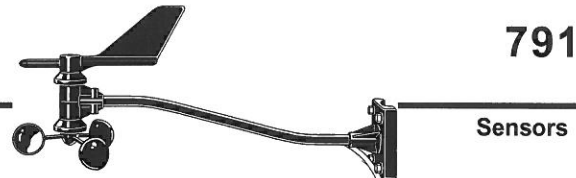

The Anemometer includes both wind speed and wind direction sensors. Rugged components stand up to hurricane-force winds, yet are sensitive to a light breeze. Includes sealed stainless-steel bearings for long life. The range and accuracy specifications of this unit have been verified in wind-tunnel tests (information available upon request). A model 7911 Anemometer reported wind speeds of 175 miles per hour before its tower collapsed during hurricane Andrew, 1992. Digital filtering, with time constant as specified below, is applied to wind direction measurements. In areas where icing of the anemometer is a problem, use Anemometer Drip Rings to deflect water from the joint between moving parts.

General

Sensor Type

Wind Speed Wind cups and magnetic switch
Wind Direction Wind vane and potentiometer

Attached Cable Length 40' (12 m)

Note: On Monitor and Wizard stations, cable lengths longer than 140' (42 m) between sensors and console may artificially limit wind speed readings. That is, beyond that length, maximum recordable wind speed decreases as cable length increases. For example, with a length of 140' (42 m), the maximum recordable speed exceeds 175 mph. At 240' (72 m), however, the maximum recordable speed drops to less than 140 mph. Below that upper limit, however, the anemometer's accuracy is not affected.

Cable Type 4-conductor, 26 AWG

Connector Modular connector (RJ-11)

Recommended Maximum Cable Length

Wizard and Monitor 140' (42 m) Sensor to Console

GroWeather and EnviroMonitor 250' (75 m) from Sensor to SIM + 250' (75 m) from SIM to Console

Material

Wind Vane and Control Head UV-resistant ABS

Wind Cups Polycarbonate

Anemometer Arm Black-anodized aluminum

Dimensions 18.5" long x 7.5" high x 4.75" wide (470 mm x 191 mm x 121 mm)

Weight 2 lbs. 15 oz. (1.332 kg)

Console Data

Note: These specifications apply to sensor output as converted by Davis Instruments weather station consoles.

Range

Wind Speed (large wind cups) (See Note 1) 2 to 150 mph, 2 to 130 knots, 1 to 67 m/s, 3 to 241 km/h

Wind Speed (small wind cups) (See Note 1) 3 to 175 mph, 3 to 150 knots, 1.5 to 79 m/s, 5 to 282 km/h

Wind Direction 0° to 360° or 16 compass points

Wind Run 0 to 1999.9 miles (1999.9 km)

Accuracy

Wind Speed (large wind cups) ±2 mph (2 kts, 3 km/h, 1 m/s) or ±5%, whichever is greater

Wind Speed (small wind cups) ±3 mph (3 kts, 5 km/h, 1.5 m/s) or ±5%, whichever is greater

Wind Direction ±7°

Wind Run ±5%

Resolution

Wind Speed 1 mph (1 knot, 0.1 m/s, 1 km/hr)

Wind Direction 1° (0° to 355°), 22.5° between compass points

Wind Run 0.1 m (0.1 km)

Sensors

Measurement Timing

- Wind Speed Sample Period 2.25 seconds
- Wind Speed Sample and Display Interval 2.25 seconds (Monitor & Wizard)
- Wind Direction Sample Interval 1 second (Monitor & Wizard)
- Wind Direction Filter Time Constant (typical) 8 seconds (Monitor & Wizard)
- Wind Direction Display Update Interval 2 seconds (Monitor & Wizard)

WeatherLink® Data


Note: These specifications apply to sensor output as logged and displayed by the WeatherLink.

- Wind Speed Average during archive interval
- High Wind Speed Maximum during archive interval
- Wind Direction Dominant wind direction during archive interval

Input/Output Connections

- Black Wind speed contact closure to ground
- Green Wind direction pot wiper (360° = 20 kOhm)
- Yellow Pot supply voltage
- Red Ground

Installation Options

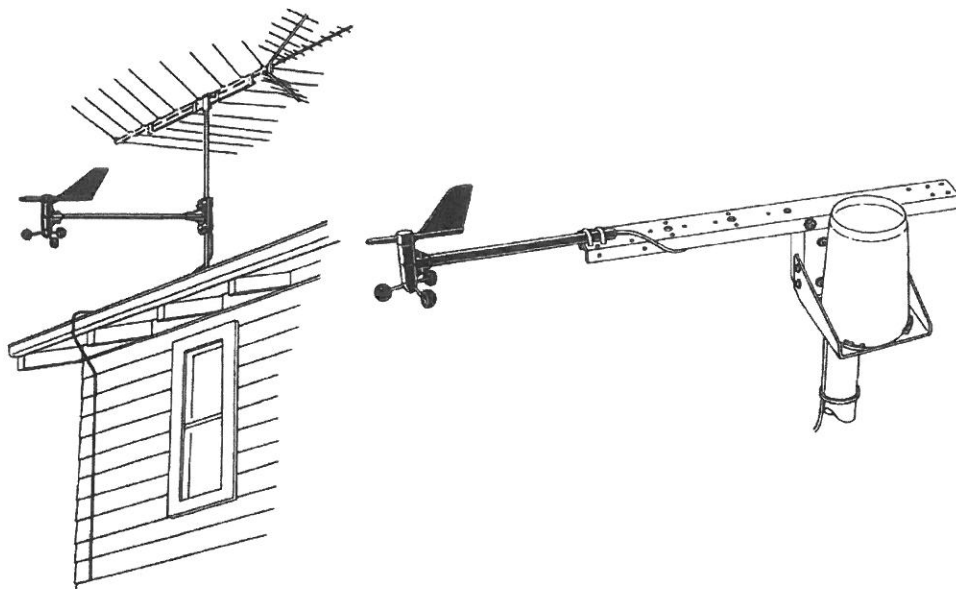

Package Dimensions

Product #	Package Dimensions (Length x Width x Height)	Package Weight	UPC Codes
7911	17.50" x 5.75" x 2.50" (445 mm x 146 mm x 64 mm)	1.7 lbs. (.71 kg)	011698 79110 1

Outputs : Wind Speed : 0 – 65,7 Hz / 0 – 67 m /s
 Wind Direction : 0 – 20 KOhm / 0 – 360 deg.