

## Minimum thermometers acc. to DIN 58653

Page 1/1



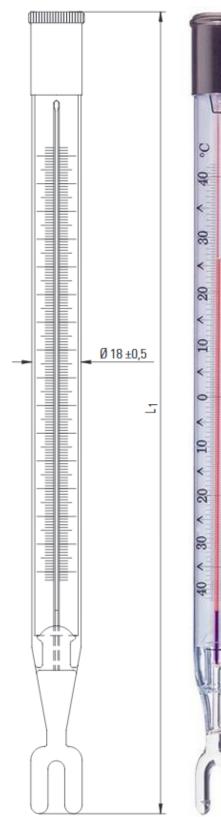



Meteorological precision minimum thermometers acc. to DIN 58653 Capillary: colorless, round Filling: alcohol, red Immersion: total With blue index marker With metal cap Suitable for official certification

Minimum thermometers are determined for meteorological measurements with subsequent reading of minimum temperatures and have to be operated in a horizontal position. In case of sinking temperature the index marker below the wetting filling will be pulled downward and remains in this position. In advance of the next measurement the upper part of the thermometer must be tilted downward to ensure that the index marker returns to the bottom of the filling.

Measuring range °C	<b>Scale</b> ℃	Total length L₁ mm	Ref. No.
-40 +40	0,5	300	1162109
-30 +50	0,5	300	1162110
-40 +40	0,2	360	1162114
-30 +50	0,2	360	1162115

Further measuring ranges on request.

## Accessory:

Stand for both, a maximum and a minimum thermometer consisting

tripod, rod and bracket for two thermometers Ref.-No: 205601

## Additional Order No.

...../01 Officially calibrated without certificate

- ...../02 Officially calibrated with certificate
- ...../03 With works certificate
- ....../04 With DKD calibration certificate

KRITECH & Co sprl Gewerbestrasse 1 B- 4731 RAEREN

Tel.: 087 / 85 04 78 Fax.: 087 / 85 31 84 Bank account: **BIC: GKCCBEBB** IBAN: BE35 7775 9579 9237